

(19) World Intellectual Property Organization
International Bureau
 506, 914
 Rec'd PCT/PTO 03 SEP 2004
 10/506914
(43) International Publication Date
12 September 2003 (12.09.2003)

PCT

(10) International Publication Number
WO 03/074628 A1(51) International Patent Classification⁷: C09K 11/06,
H05B 33/14, H01L 51/20

(21) International Application Number: PCT/GB03/00857

(22) International Filing Date: 3 March 2003 (03.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0204989.8 4 March 2002 (04.03.2002) GB(71) Applicant (for all designated States except US): CDT
OXFORD LIMITED [GB/GB]; c/o IP Department,
Greenwich House, Madingley Rise, Madingley Road,
Cambridge, Cambridgeshire CB3 0TX (GB).

(72) Inventors; and



(75) Inventors/Applicants (for US only): ANDREWS, Mark,
David [GB/GB]; CDT Oxford Limited, c/o IP Department,
Greenwich House, Madingley Rise, Madingley Road,
Cambridge, Cambridgeshire CB3 0TX (GB). LOOK,
Kai [DE/GB]; CDT Oxford Limited, c/o IP Department,
Greenwich House, Madingley Rise, Madingley Road,
Cambridge, Cambridgeshire CB3 0TX (GB). MOSLEY,
Alan [GB/GB]; CDT Oxford Limited, c/o IP Department,
Greenwich House, Madingley Rise, Madingley Road,
Cambridge, Cambridgeshire CB3 0TX (GB). STEUDEL,
Annette, Regine [AU/GB]; CDT Oxford Limited, c/o
IP Department, Greenwich House, Madingley Rise,Madingley Road, Cambridge, Cambridgeshire CB3 0TX
(GB). MALE, Nigel [GB/GB]; CDT Oxford Limited,
c/o IP Department, Greenwich House, Madingley Rise,
Madingley Road, Cambridge, Cambridgeshire CB3 0TX
(GB). MAXTED, Neil [GB/GB]; CDT Oxford Limited,
c/o IP Department, Greenwich House, Madingley Rise,
Madingley Road, Cambridge, Cambridgeshire CB3 0TX
(GB).(74) Agent: KIRBY, Elizabeth; CDT Oxford Limited, c/o IP
Department, Greenwich House, Madingley Rise, Mading-
ley Road, Cambridge, Cambridgeshire CB3 0TX (GB).(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: PHOSPHORESCENT COMPOSITIONS AND ORGANIC LIGHT EMITTING DEVICES CONTAINING THEM

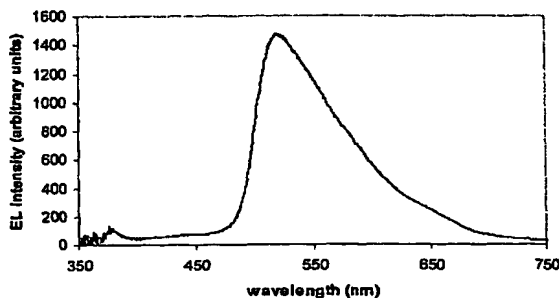

(57) Abstract: Compositions of a mixture of (A) a polymerisable compound, which undergoes polymerisation on exposure to heat or to actinic radiation, having the general formula (1) wherein Q is an organic charge transporting fragment, L is a linker group, X is a group capable of undergoing free radical or anionic polymerisation on exposure to heat or actinic radiation, m is 0 or 1, and n is an integer having a value of 2 or more; and (B) a phosphorescent material are described, as is an organic light-emitting diode (OLED) device comprising at least one emissive layer that has been formed by polymerising such a composition. A method for forming an OLED, including depositing a layer containing the polymerisable composition from solution and exposing the layer to heat or actinic radiation to induce polymerisation, is also disclosed.

WO 03/074628 A1

WO 03/074628 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**PHOSPHORESCENT COMPOSITIONS AND ORGANIC LIGHT
EMITTING DEVICES CONTAINING THEM**

Background to the Invention

Organic light emitting diodes (OLEDs) are an emerging display technology. In essence an OLED (or organic electroluminescent device) comprises a thin organic layer or stack of organic layers sandwiched between two electrodes, such that when a voltage is applied, light is emitted. At least one of the electrodes must be transparent to visible light.

There are two principal techniques that can be used to deposit the organic layers in an OLED: thermal evaporation and solution processing. Solution processing has the potential to be the lower cost technique due to its potentially greater throughput and ability to handle large substrate sizes. However, several manufacturing issues still have to be resolved before solution processing of OLEDs can fulfil its potential. In a multi-colour or full-colour display the emissive organic layers need to be patterned according to the pixel layout. High-resolution displays require a high-resolution pattern for the emissive layer. To date, solution-processing techniques for patterning the emissive layer are far from ideal.

Recent advances in OLED efficiencies have been made using phosphorescent rather than fluorescent emitters. Simple spin statistics would predict that one singlet exciton is formed for every three triplet excitons. In most organic compounds only the singlet states are emissive, so the maximum potential internal efficiency is 25%. (Note, however, that the simple spin statistics may not be applicable to conjugated polymers.) However, in phosphorescent compounds, the triplet states are emissive, which allows a greater proportion of the excitons to be utilised. Phosphorescent compounds typically have strong spin-orbit coupling, for example due to the presence of a heavy element, such as Ir or Pt. In many cases, the most efficient OLED devices have multi-layer structures (e.g. WO 00/57676 and US 6303238). Such multi-layer structures can be formed by thermal evaporation, but when

solution-processing techniques are used, depositing a second layer may wash away the first layer.

In an organic light-emitting display the organic light-emitting layer is generally divided into individual pixels, which can be switched between emitting and non-emitting states by altering the current flow through them. In general, the pixels are arranged in orthogonal rows and columns, and two arrangements for addressing the pixels are in common use: passive matrix and active matrix. In a passive-matrix device, one of the electrodes is patterned in rows and the other in columns, and each pixel can be made to emit light by applying an appropriate voltage between the row and column electrodes that intersect at the pixel in question. Each row is addressed in turn for a fraction of the frame time. There is a practical limit on the number of rows that can be driven with a passive-matrix addressing scheme. In an active-matrix display, circuitry (typically a transistor or combination of transistors) is provided for each pixel so that each pixel can be left in an emitting state while another pixel is addressed. Integration of the active-matrix circuitry and the organic light-emitting device is more complicated than for a passive matrix display but active-matrix OLEDs are expected to have benefits in terms of size of display, power consumption and lifetime.

It has been recognised that if a photolithographic technique could be successfully applied to the patterning of the organic layers in an OLED then this would offer many benefits. Photolithographic techniques are established in other industries and can give good resolution and high throughput. However the attempts to use photolithography during the formation of the organic layers in OLEDs have all had only very limited success.

BASF (US 5518824) discusses the principle of forming an OLED using a crosslinkable charge-transporting material. The material is deposited from solution, and then exposed to UV light, which crosslinks the material making it insoluble. Subsequent luminescent or electron transporting layers can be deposited on top of the insoluble layer. BASF mentions that if the UV exposure is carried out through a mask, then the exposed areas will be insoluble and the unexposed areas still soluble, and developing (washing) this

film in solvent will remove the unexposed material, leaving the insoluble patterned material. However, this patterning is not demonstrated. BASF discuss doping the film with a fluorescent dye or using a crosslinkable fluorescent dye (US 5922481) to form the light-emitting layer. The EL device results reported by BASF from its crosslinked devices are very poor. The two devices reported, which have cross-linked but un-patterned light emitting layers, give light emission only at 87 V and 91 V, respectively, both of which are entirely unacceptable operating voltages for an OLED.


Bayerl et al. (Macromolecules 1999, 20, 224-228) used crosslinked oxetane-bisfunctionalized N,N,N',N'-tetraphenyl-benzidine as the hole-transporting material in a two-layer device, in which the electron-transporting layer consisted of a poly(α -methylstyrene) matrix doped with 2-biphenyl-5-(4-tert-butylphenyl)-3,4-oxadiazol (50wt%) and the emitter perylene (1wt%). This device gave blue emission. However, they did not pattern the hole-transporting material. Bacher et al. (Macromolecules 1999, 32, 4551-4557) demonstrated photo-crosslinking of a hole-transporting material. They produced a patterned photo-crosslinked hole-transport layer on to which they deposited an emissive layer (tris(8-hydroxyquinoline)aluminium: Alq₃), and made a functioning OLED device. However, they had not developed a technique for photo-lithographically patterning the emissive layer, and unless the emissive layer can also be patterned, only a monochrome device can be formed.

The present invention is directed to OLEDs that solve some of the problems in the prior art.

Summary of the current invention

According to one aspect, the present invention provides a composition comprising a mixture of

(A) a polymerisable compound, which undergoes polymerisation on exposure to heat or to actinic radiation, having the general formula




wherein Q is an organic charge transporting fragment, L is a linker group, X is a group capable of undergoing free radical or anionic polymerisation on exposure to heat or actinic radiation, m is 0 or 1, and n is an integer having a value of 2 or more; and

(B) a phosphorescent material.

According to a second aspect, the present invention provides a solid film comprising a heat-induced or a radiation-induced polymerisation reaction product of a composition comprising a mixture of

(A) a polymerisable compound, which undergoes polymerisation on exposure to heat or to actinic radiation, having the general formula



wherein Q is an organic charge transporting fragment, L is a linker group, X is a group capable of undergoing free radical or anionic polymerisation on exposure to heat or actinic radiation, m is 0 or 1, and n is an integer having a value of 2 or more; and


(B) a phosphorescent material.

According to a third aspect, the present invention provides a laminate comprising at least two solid films according to the second aspect.

According to a further aspect, the present invention provides an organic light emitting device comprising, laminated in sequence, a substrate, electrode, light emitting layer and counter electrode wherein the light emitting layer is a film according to the above second aspect or a laminate according to the above third aspect.

According to a yet further aspect, the present invention provides a method of making a light emitting layer for use in an organic light emitting device which method comprises forming a film of a composition comprising a mixture of

(A) a polymerisable compound, which undergoes polymerisation on exposure to heat or to actinic radiation, having the general formula



wherein Q is an organic charge transporting fragment, L is a linker group, X is a group capable of undergoing free radical or anionic polymerisation on exposure to heat or actinic radiation, m is 0 or 1, and n is an integer having a value of 2 or more: and

(B) a phosphorescent material

and exposing the film to heat or actinic radiation to induce polymerisation of the polymerisable compound.

According to a yet still further aspect, the present invention provides a method of forming a multicolour organic light emitting layer comprising the steps of

(i) forming a film of a composition of the invention which is capable of emitting light of a first colour;

(ii) exposing the film to actinic radiation through a mask;

(iii) removing unexposed material from the film to leave a predetermined pattern of exposed material;

(iv) forming, on the predetermined pattern of exposed material obtained in step (iii), a film of a composition of the invention which is capable of emitting light of a second colour different from the first colour; and

(v) exposing the film formed in step (iv) to actinic radiation through a mask. The method may, if desired, comprise the further steps:

(vi) removing unexposed material from the film exposed in step (v) to leave a predetermined pattern of exposed material;


(vii) forming, on the predetermined pattern of exposed material obtained in step (vi), a film of a composition of the invention which is capable of emitting light of a third colour which is different from the first and second colours; and

(viii) exposing the film formed in step (vii) to actinic radiation through a mask.

Detailed description of the current invention

The composition of the present invention comprises a mixture of

(A) a polymerisable compound, which undergoes polymerisation on exposure to heat or to actinic radiation, having the general formula



wherein Q is an organic charge transporting fragment, L is a linker group, X is a group capable of undergoing free radical or anionic polymerisation on exposure to heat or actinic radiation, m is 0 or 1, and n is an integer having a value of 2 or more: and

(B) a phosphorescent material.

The charge-transporting fragment is preferably a bipolar or hole-transporting fragment, although an electron-transporting fragment could also be used. The triplet energy level of Q is positioned such that there can be effective energy transfer to the phosphorescent material, i.e. the triplet energy level of Q must be comparable with or slightly above the energy level of the emissive state of the phosphorescent material. As an organic species, Q will preferably have a long-lived triplet excited state.

The phosphorescent material is preferably the minor component in the film.

X is a group capable of undergoing thermal- or photo-initiated free radical or anionic polymerisation. For free radical polymerisation, X is preferably an acrylic group, for example acrylate, methacrylate, acrylonitrile, methacrylonitrile, acrylamide, and methacrylamide. Also useful are vinyl compounds, especially vinyl aromatic compounds, for example styrene, alkylstyrene, halostyrene, vinylnaphthalene, or N-vinylcarbazole. X can also be a vinyl group which is in conjugation with the rest of the molecule, Q. Moreover, vinyl esters of monocarboxylic and polycarboxylic acids, N-vinyl lactams such as N-vinylpyrrolidone, vinyl ethers of monohydroxy and polyhydroxy compounds, allyl compounds, for example allyl esters of monocarboxylic and polycarboxylic acids and allyl ethers of monocarboxylic and polycarboxylic compounds can also be used. For anionic polymerisation

X is preferably a cyclic ether such as an epoxide. X is preferably connected to Q by a linker group, L. Examples of preferred linker groups include $-(CH_2)_p-$, where p is 1 to 6, or $-(CH_2)_r-O-(CH_2)_s-$, where r + s is 1 to 6. Alternative linker groups include thioether, ester or amide.

An OLED device according to the invention comprises, laminated in sequence, a substrate, electrode, light emitting layer and counter electrode wherein the light emitting layer is a film comprising a heat- or radiation-induced polymerisation product of the composition described above or a laminate of two or more such films. The film is preferably made by a process comprising

- i) depositing a film of a composition of the invention
- ii) exposing said film to actinic radiation (for example, UV light, visible light, electron beams or X-rays), optionally through a mask
- iii) optionally washing the exposed film to remove any unexposed material.

Preferably, the actinic radiation is visible or UV light.

The OLED can be part of a passive-matrix display or an active-matrix display, however, we believe that phosphorescent materials can be used advantageously with active-matrix addressed OLEDs in particular to give improved device efficiencies.

As is well known in the field there may be additional functional layers in the OLED. There may be a hole-transporting layer between the anode and the light emitting layer, and a hole-blocking layer and/or electron-transporting layer(s) between the light-emitting layer and the cathode. A hole-blocking layer between the phosphorescent light-emitting layer and the cathode is particularly beneficial. The light-emitting layer may also contain photo-initiator or other components. Following washing or developing of the film, the film may be dried or undergo other post-patterning treatment.

The light-emitting layer is preferably patterned, that is a suitable photo-mask is used when the film is exposed to light. This patterning technique allows a multi-colour OLED to be formed. A film that emits a first colour is deposited, patterned and developed to form pixels of the first colour. At this


stage, since the film of the first colour is crosslinked it is insoluble, which allows a film of the second colour material to be deposited without disrupting the first colour. This second film is patterned and developed to form pixels of the second colour. The process can be repeated to deposit a third colour.

A solution-processing technique, such as spin-coating, ink-jet printing, dip-coating meniscus or roller coating, or other printing or coating technique such as thermal transfer, is used to deposit the light-emitting layer.


Suitable phosphorescent materials for use in the composition of the invention include heavy transition metal complexes. The phosphorescent material is preferably an organometallic complex of iridium for example Ir(ppy)_3 (*fac* tris(2-phenylpyridine)iridium), which gives green emission (see Baldo et al., *Appl. Phys. Lett.*, **75** no.1, 1999, 4), or $(\text{btp})_2\text{Ir(acac)}$ (bis(2-(2'-benzo[4,5-*a*]thienyl) pyridinato-N,C^{3'}) iridium (acetyl-acetonate)), which gives red emission (see Adachi et al., *Appl. Phys. Lett.*, **78** no.11, 2001, 1622). It could, instead, be a complex of platinum, for example 2,3,7,8,12,13,17,18-octaethyl-21H,23H-porphine platinum (PtOEP) which gives red emission. The phosphorescent material could also be a molecular or dendritic species, for example an iridium-cored dendrimer.

The concentration of the phosphorescent material in the host material should be such that the film has a high photoluminescent and electroluminescent efficiency. If the concentration of the emissive species is too high, quenching of luminescence can occur. A concentration in the range 0.5-15 molar %, more preferably 2-6 molar %, is generally appropriate.


In the polymerisable host, $\text{Q}-(\text{L})_m-\text{X}$, the charge-transporting fragment, Q, preferably contains at least one carbazole or arylamine unit. More preferably, Q contains at least two carbazole units. Q can be based on known hole-transporting arylamine materials such as those with the formula




where Ar is an optionally substituted aromatic group, such as phenyl, or

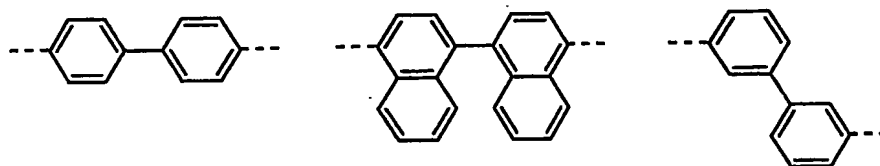

and Ar_1 , Ar_2 , Ar_3 and Ar_4 are optionally substituted aromatic or heteroaromatic groups. Ar is preferably biphenyl. At least two of Ar_1 , Ar_2 , Ar_3 and Ar_4 are bonded to a cross-linkable group, X . Ar_1 and Ar_2 , and/or Ar_3 and Ar_4 are optionally linked to form a N containing ring, for example so that the N forms part of a carbazole u

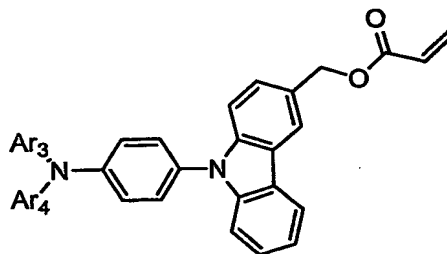

In a preferred embodiment the polymerisable charge-transport material is a derivative of CBP (4,4'-bis(carbazol-9-yl)biphenyl), or TCTA (4,4',4''-tris(carbazol-9-yl)triphenylamine); see Ikai et al. (*Appl. Phys. Lett.*, **79** no. 2, 2001, 156) for a discussion of previously used hosts for phosphorescent dopants. The polymerisable group, X , is preferably acrylate or methacrylate. Hence a preferred example of the polymerisable host is:

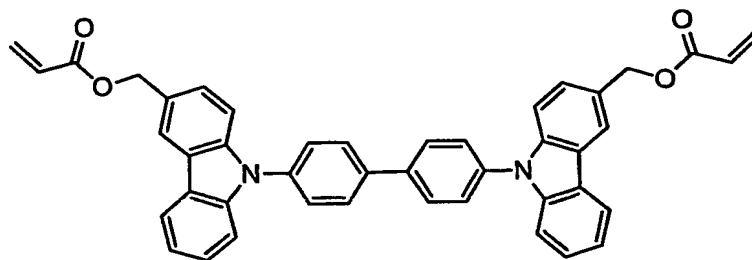


KLCBP1

As can be seen from the example, there is a linker group $-CH_2-$ between the charge-transporting moiety and the acrylate group. Such a linker group improves the film forming properties of the material, allowing good quality

films to be deposited from solution. The linker group also aids the polymerisation process.

In an alternative embodiment X is styrene and the polymerisable host is

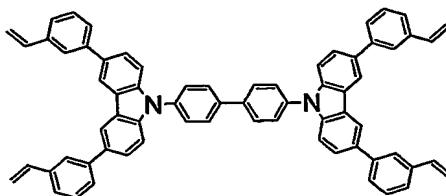

The host material must have at least two polymerisable groups to form a crosslinked network. A crosslinked network is necessary to ensure the film is insoluble after polymerisation. The film could contain a mixture of monomers, with different monomers having different numbers of polymerisable functional groups.

In another embodiment, Q is an electron-transporting material such as an aryl substituted oxadiazole or an aryl substituted triazole of which specific examples include TAZ (3-phenyl-4-(1-naphthyl)-5-phenyl-1,2,4-triazole) and OXD-7 (1,3-bis(N,N-t-butyl-phenyl)-1,3,4-oxadiazole).

Acrylate derivatives can be easily photo-polymerised, and good resolution can be obtained in patterned films. For acrylate systems there are suitable known initiators for activation by either UV light or visible light. For successful initiation, it is generally preferable to use a wavelength of light that is absorbed by the initiator but not strongly absorbed by the other components of the film. In this way the initiator functions well and photo-degradation of the film is minimised. One advantage of the current invention, in which the major component of the film is the charge transporting layer, is that the band gap of charge-transporting materials is generally larger than that of luminescent species, and hence it is easier to find a wavelength of light which is not more strongly absorbed than it is in systems in which the major component of the film contains the chromophore.

It had not previously been known whether phosphorescent materials would be sufficiently stable to the photo-polymerisation of the acrylate moieties, nor what the device performance would be. Reported results from

photo-polymerised crosslinked acrylate systems with fluorescent dopants are very poor. The inventors have found that the films described in this invention are sufficiently stable to the polymerisation process and give much better OLED device results than the previously reported systems. Changing from a fluorescent emitter to a phosphorescent emitter could potentially increase the efficiency by a factor of four (spin statistics). However, we have unexpectedly found a much greater increase in efficiency than could be accounted for solely by this change.


The inventors have examined cured films of Ir(ppy)_3 doped in KLCBP1 and found that the film can be washed with solvent without washing Ir(ppy)_3 from the film, even though the Ir(ppy)_3 is not chemically bound in the film and is in a relatively high concentration. In contrast, when some fluorescent dyes were doped into similar films they did wash out of the films. It would be possible, if desired, to modify the phosphorescent compound so that it contained a polymerisable functional group. Then such a phosphorescent compound could be co-polymerised with the host material.

A further advantage of the current system is that the inventors have found that films of Ir(ppy)_3 in KLCBP1 can be crosslinked by exposure to light, even when no separate initiator has been added to the film. It is advantageous for OLED performance to avoid using an initiator. An initiator is likely, at least partly, to remain in the film, even after development, and may have a deleterious effect on the OLED efficiency or lifetime.

Devices made from such materials have higher efficiency than any previous reports of OLEDs with photo-patterned emissive layers.

Figure 1 shows the electroluminescent (EL) emission spectrum of a device containing Ir(ppy)_3 in a crosslinked acrylate host.

Figure 2 shows the EL emission spectrum of a device containing Ir(ppy)_3 in a crosslinked styrene host.

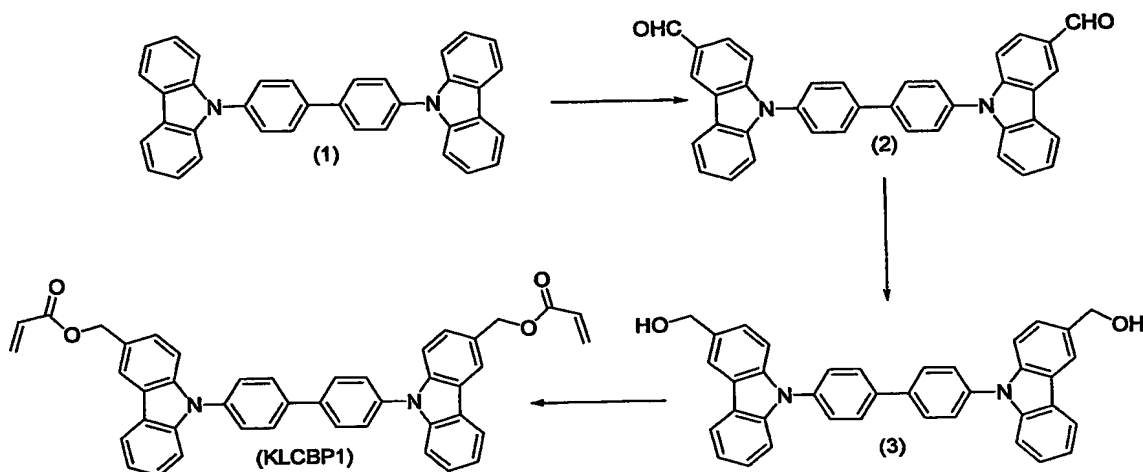Examples**Synthesis of 4,4'-bis(3-(acryloyloxymethyl)carbazol-9-yl) (KLCBP1)****Reaction Scheme****Synthesis of 4,4'-bis(carbazol-9-yl)biphenyl (CBP) (1)**

Tri-*tert*-butylphosphine (304 mg, 1.50 mmol) in toluene (38 ml) was added under nitrogen to a deoxygenated mixture of carbazole (16.9 g, 0.100 mmol), 4,4'-dibromobiphenyl (15.7 g, 50.4 mmol), sodium *tert*-butoxide (30.9 g, 321 mmol) and palladium acetate (115 mg, 0.512 mmol) in toluene (50 ml) and the resulting mixture was heated at reflux under nitrogen for 10 days. The reaction mixture was cooled to room temperature and then diluted with more toluene (200 ml). The reaction mixture was filtered to remove the sodium salts. The filtrate was concentrated to dryness to give the crude product as a pale brown solid. The crude product was purified first by chromatography on silica using dichloromethane as the eluent followed by recrystallisation from toluene. The material was then sublimed at 280-281°C at 10^{-6} mm Hg to give the product 4,4'-bis(carbazol-9-yl)biphenyl (1) (18.3 g, 75 %), as an off-white solid with melting point 280-281 °C (lit. m.p. 281°C).

Synthesis of the 4,4'-bis(3-formylcarbazol-9-yl)biphenyl (2)

Phosphorus oxychloride (13.0 ml, 21.5 g, 140 mmol) was added dropwise to a stirring mixture of N,N-dimethylformamide (5.40 ml, 5.10 g, 69.7 mmol) and

4,4'-bis(carbazol-9-yl)biphenyl (1) (7.72 g, 16.0 mmol) and the resulting mixture was stirred at room temperature for 5 minutes then heated to 90°C for 24 h. The reaction mixture was poured into water (800 ml) and the flask containing the product was placed in the ultrasonic bath for 2 hours to break up the material. The mixture was stirred for 2 hours then filtered. The residue was washed with water (500 ml) followed by hexane (500 ml) and dried at the pump for 2 hours. The crude product, a brown solid, was heated at reflux with acetone (3 x 400 ml) and filtered. The product, *4,4'-bis(3-formylcarbazol-9-yl)-biphenyl*, (2) (7.92 g, 87 %) was obtained as an cream solid with melting point 295°C (dec). ¹H n.m.r.: (300 MHz, Me₂SO): δ 10.09 (2 H, s, CHO); 8.88 (2 H, d, *J* 0.88 Hz, aromatic H); 8.41 (2 H, d, *J* 7.61 Hz, aromatic H); 8.41 (4 H, d, *J* 8.49 Hz, aromatic H); 8.00 (2 H, dd, *J* 8.49, 1.46 Hz, aromatic H); 7.83 (4 H, d, *J* 8.49 Hz, aromatic H); 7.61-7.38 (8 H, m, aromatic H). λ_{max}(CH₂Cl₂): 215 nm (ε / Lmol⁻¹cm⁻¹ 9163), 241 (68 488), 272 (65 928), 294 (67 194) 328 (42 620). FT-IR (solid): 3045, 2825, 2730, 1682, 1623, 1591, 1505, 1456, 1438, 1365, 1319, 1275, 1230, 1180, 802, 745 cm⁻¹. m/z (TOF) 540 (M⁺).

Synthesis of the 4,4'-bis(3-(hydroxymethyl)carbazol-9-yl)biphenyl (3)

Sodium borohydride (2.40 g, 63.4 mmol) was added to the 4,4'-bis(3-formylcarbazol-9-yl)biphenyl (2) (3.42 g, 6.33 mmol) in THF (1.2 L) and the resulting suspension was stirred at room temperature for 24 h. Once the reaction was complete, the mixture was slowly poured into water (400 ml) and the mixture was left to stir at room temperature for a further 30 min. The reaction mixture was acidified to pH 6 with hydrochloric acid (5M) and the product was extracted with dichloromethane (3 x 300 ml). The combined organic phase was washed with water (400 ml) and brine (400 ml), dried (MgSO₄), filtered and the filtrate evaporated to dryness. The crude product was purified by chromatography on silica using 50% THF/toluene as the eluent. The product, *4,4'-bis(3-(hydroxymethyl)carbazol-9-yl)*(3) was obtained as a pale yellow solid (3.22 g, 94 %) with m.p. 268°C (dec). ¹H n.m.r.: (300 MHz, CDCl₃): δ 8.23 (2 H, d, *J* 7.61 Hz, aromatic H); 8.18 (2 H, s, aromatic H); 8.06 (4 H, d, *J*

8.19 Hz, aromatic H); 7.75 (4 H, *J* 8.19 Hz, aromatic H); 7.50-7.38 (8 H, m, aromatic H), 7.29 (2 H, m, aromatic H); 5.25 (2H, t, *J* 5.58 Hz, OH); 4.68 (4H, d, *J* 5.56 Hz, CH₂). λ_{\max} (CH₂Cl₂): 216 nm (ϵ / Lmol⁻¹cm⁻¹ 177 455), 240 (57 873), 271 (56 595), 294 (55 330) 329 (37 758). FTIR (solid): 3343, 1604, 1500, 1485, 1455, 1362, 1330, 1230, 803, 745 cm⁻¹. *m/z* (TOF) 544 (M⁺).

Synthesis of 4,4'-bis(3-(acryloyloxymethyl)carbazol-9-yl) (KLCBP1)

Acryloyl chloride (0.613 g, 0.550 ml, 6.77 mmol) in dichloromethane (20 ml) was added dropwise to a mixture of the diol (3) (1.41 g, 2.58 mmol) and triethylamine (1.09 g, 1.50 ml, 10.8 mmol) in dichloromethane (500 ml) and the resulting mixture was stirred at room temperature for 2 h. The solvent, excess triethylamine and acryloyl chloride were removed under reduced pressure without heating (to avoid polymerisation) and the crude product was dried for a further 30 min to ensure that all reagents had been evaporated. The crude product was dissolved in dichloromethane (150 ml) and the organic phase was washed with water (2 x 200 ml) and brine (200 ml), dried (MgSO₄), filtered and the filtrate evaporated to dryness. The product was recrystallised from ethanol to give the product, 4,4'-bis(3-(acryloyloxymethyl)carbazol-9-yl), as a cream solid (1.48 g, 88 %) with melting point 68°C. ¹H n.m.r.: (300 MHz, CDCl₃): δ 8.19 (2 H, s, aromatic H); 8.16 (2H, d, *J* 7.91 Hz, aromatic H); 7.90 (4 H, d, *J* 8.48 Hz, aromatic H); 7.68 (4 H, d, *J* 8.48, aromatic H); 7.51-7.41 (8 H, m, aromatic H); 7.31(2 H, m, aromatic H); 6.46 (2 H, dd, *J*_{trans} 17.57, *J*_{gem} 1.46 Hz, C=C-H); 6.18 (2 H, dd, *J*_{trans} 17.26, *J*_{cis} 10.53 Hz, C=C-H); 5.84 (2 H, dd, *J*_{cis} 10.24, *J*_{gem} 1.46 Hz, C=C-H); 5.40 (4 H, s, CH₂). FT-IR (solid): 3039, 2972, 1718, 1631, 1604, 1501, 1456, 1404, 1362, 1294, 1231, 1179, 1044, 806, 746 cm⁻¹. λ_{\max} (CH₂Cl₂): 240 nm (ϵ / Lmol⁻¹cm⁻¹ 82 245), 294 (37 245), 316 (27 565). PL: λ_{\max} (solid) 374 nm with CIE coordinates *x* = 0.174, *y* = 0.032, PL: λ_{\max} (CHCl₃) 381 nm with CIE coordinates *x* = 0.165, *y* = 0.021. *m/z* (TOF) 652 (M⁺).

Fabrication of phosphorescent emitter doped photo-crosslinked OLEDs


Ir(ppy)_3 (4wt%) and the monomer KLCBP1 were dissolved in pure chloroform at total concentration 10 mg ml⁻¹. The solutions were spun onto ITO coated glass substrates (previously cleaned by ultrasonication in commercial detergent and thorough rinsing with DI water). Prior to spin-coating the dry ITO coated glass was plasma-treated in an Emitech K1050X plasma unit (process gas oxygen, 100 W, 2 min). Solutions were spun onto the ITO substrates at 2000 rpm with acceleration 500 rs⁻¹ for a total of 60 s giving an emitting organic layer of thickness ca 50 nm. Films were then photopolymerized under an inert atmosphere (N₂) using a Hanovir UVA 250W U.V source. The films were irradiated for 3 minutes through a 5" x 5" glass photo mask (cut-off 360 nm) giving a rectangular exposed area 15 x 20 mm. The photopolymerized films were developed by rinsing with pure toluene, dried under a stream of dry nitrogen and transferred to the evaporator (KJLesker) for completion of the OLED by evaporation of the electron-transporting layer/hole-blocking layer (ETL/HBL) and top electrode. TPBI deposited by vacuum evaporation formed the ETL/HBL (60 nm). LiF (0.5 nm) and Aluminium (100-150 nm) deposited by vacuum evaporation formed the cathode.

Device performance: 3.4 cd/A (@105 cd/m²), 0.44 lm/W (@24.2 V), ToV (turn-on voltage) 17.0 V. These results not only show a significantly reduced turn-on voltage compared with previously reported OLEDs with crosslinked acrylate emissive layers. They also show improved luminous power efficiency (0.44 lm/W) compared with previously reported OLEDs with photo-patterned emissive layers. The electroluminescent spectrum is shown in figure 1. The peak in the emission spectrum occurs at 520 nm.

The device results above compare favourably with those from a similar device with the inclusion of an initiator, i.e. Ir(ppy)_3 (4wt%) doped into a KLCBP1 monomer host with 0.5wt% HNu470 initiator (Spectra Group Limited). For this device the following summarizes the results: 1.1 cd/A (@101 cd/m²), 0.15 lm/W (@21.6 V), ToV (turn-on voltage) 15.6 V.

Example 2**Synthesis of Bis[3,6(3-vinylphenyl)-carbazol-9-yl]biphenyl (CBP-st₄)**

Scheme 1 describes the synthesis of CBP-st₄

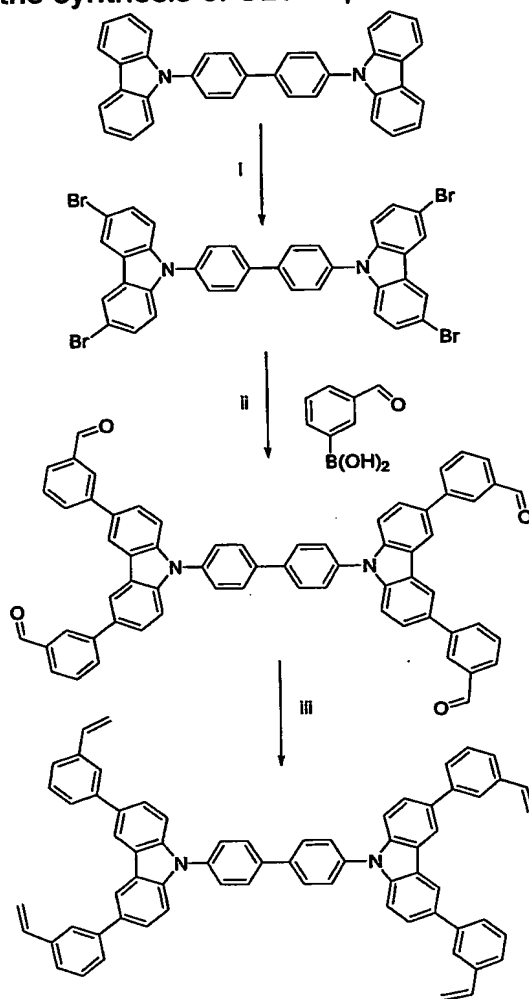

Scheme 1: i. Br₂ in DCM ii. Pd(PPh₃)₄, Na₂CO₃, EtOH, Toluene iii MePh₃PBr, KOBu^t in THF

Synthesis of 4,4'-bis(carbazol-9-yl)biphenyl (CBP)

see example 1

4,4'-bis(3,6-dibromocarbazol-9-yl)biphenyl (CBP-Br₄)

Bromine (2.0 ml, 6.22 g, 38.9 mmol) in dichloromethane (50 ml) was added dropwise to a solution of CBP (3.56 g, 7.35 mmol) in dichloromethane (500

ml). The reaction mixture was stirred at room temperature for a further 20 h, then heated at reflux for a further 10 h. The reaction mixture was cooled to room temperature and the precipitate was filtered off and dried at the pump. The product was washed with dichloromethane (200 ml) and hexane (200 ml) and the material was dried under vacuum for a further 3 hours. The product, *4,4'-bis(2,3-dibromocarbazol-9-yl)biphenyl*, was obtained as a white precipitate with m.p. 380°C (dec.). The product was found to be insoluble in all organic solvents. Found: C, 54.29; H, 2.58; and N, 3.69. $C_{36}H_{20}N_2Br_4$. requires C, 54.04; H, 2.52; N, 3.50 %).

Synthesis of Bis[3,6(3-formylphenyl)-carbazol-9-yl]biphenyl

Bis(3,6-dibromocarbazol-9-yl)biphenyl (2.90 g, 1.67 mmol) and 3-formylphenylboronic acid (2.21 g, 14.7 mmol) were combined then toluene (50 ml), ethanol (20 ml) and a solution of sodium carbonate (2M, 20 ml) were added with stirring then mixture was deoxygenated by bubbling a stream of nitrogen through the solution. Tetrakis(triphenylphosphine)palladium (170 mg, 0.147 mmol) was added and the mixture was heated at reflux for 5 days (oil bath temperature was set to 100°C). The reaction mixture was cooled to room temperature then poured into water (100 ml). Dichloromethane (150 ml) was added and the organic phase was separated. The aqueous phase was extracted twice more with dichloromethane (2 x 50 ml). The organic phases were combined then washed with water (200 ml) and brine (150 ml), dried over magnesium sulfate and filtered. The filtrate was evaporated to dryness to give the crude product as a pale brown solid. The product was purified by chromatography on silica using a mixture (1:99) of ethanol and dichloromethane as the eluent. The relevant fractions were combined and the product, *bis[3,6(3-formylphenyl)-carbazol-9-yl]biphenyl* was obtained as a yellow solid (2.01 g, 62 %) with m.p. 285-290°C (dec). 1H n.m.r (300 MHz, $CDCl_3$): δ 7.60-7.69, m, 8 ArH; 7.70-7.80, m, 8 ArH; 7.88, d, 4 ArH, J 7.62 Hz; 7.96-8.06, m, 8 ArH; 8.28, s, 4 ArH; 10.15, s, 4 CHO. UV: ($CHCl_3$) λ 256 nm (ϵ 68 709), 296 (49 448). FT-IR: (solid) 1698, 1602, 1505, 1473, 1362, 1286,

1231, 1180, 1159783, 754 cm^{-1} . UV: (CHCl_3) λ 256 nm (ϵ 68 709), 296 (49 448).

Synthesis of Bis[3,6(3-vinylphenyl)-carbazol-9-yl]bipheny) (CBP-st₄).

Methyltriphenylphosphonium bromide (3.10 g, 8.68 mmol) and potassium *tert*-butoxide (0.973 g, 8.67 mmol) were combined under nitrogen and the mixture was deoxygenated further under vacuum then backfilled with nitrogen. Freshly distilled THF (100 ml) was added under nitrogen and the resulting mixture, a bright yellow suspension, was stirred at room temperature for 20 min. The tetraaldehyde was added and the resulting mixture was stirred for a further 3 h. The reaction mixture was diluted with dichloromethane and filtered through cellite. The filtrate was evaporated to dryness and a bright yellow crude product was obtained. The product was purified by chromatography on silica using an 80% mixture of dichloromethane/hexane as the eluent. The relevant fractions were combined, the solvent removed under reduced pressure and the product was evaporated to dryness. The product, *bis*[3,6(3-formylphenyl)-carbazol-9-yl]biphenyl, was obtained as a white solid (0.765 g, 60 %) with m.p. 268°C (dec.). Found: C, 91.18; H, 5.25; N, 3.15. Calculated for $\text{C}_{68}\text{H}_{48}\text{N}_2$: C, 91.45; H, 5.42; N, 3.14. ^1H n.m.r (300 MHz, CDCl_3): δ 5.26, d, 4 vinyl H, J_{cis} 10.5 Hz; 5.81, d, 4 vinyl H, J_{trans} 17.6 Hz; 6.78, dd, 4 vinyl H, J_{trans} 17.6, J_{cis} 10.5 Hz; 7.30-7.45, m, 8 ArH; 7.50-7.72, m, 20 ArH; 7.87, d, 4 ArH, J 8.25 Hz; 8.37, s, 4 ArH. UV: (CHCl_3) λ 257 nm (ϵ 159 273), 297 (101 667). FT-IR: (solid) 3050, 1596, 1500, 1472, 1450, 1360, 1282, 1227, 1166, 984, 893, 870, 785, 706 cm^{-1} .

Fabrication of an OLED containing a photo-crosslinked emissive layer comprising a styryl-derivative and a phosphorescent dopant

$\text{Ir}(\text{ppy})_3$ (7wt%) was used as the emitter doped in the tetra-styryl substituted CBP monomer CBP-st₄. The formulation was dissolved in pure chloroform at total concentration 7 mg ml^{-1} . The solutions were spun onto ITO coated glass

substrates (previously cleaned by ultrasonication in commercial detergent and thorough rinsing with DI water). Prior to spin-coating the dry ITO coated glass was plasma-treated in an Emitech K1050X plasma unit (process gas oxygen, 100 W, 2 min). Solutions were spun onto the ITO substrates at 2000 rpm with acceleration 500 rs^{-1} for a total of 30 s giving an emitting organic layer of thickness *ca* 50 nm. Films were then photopolymerized under an inert atmosphere (N_2) using a Hanovir UVA 250W UV source. The films were irradiated for 4 minutes through a 5" x 5" glass photo mask (cut-off 360 nm) giving a rectangular exposed area 15 x 20 mm. Overlap of this area with ITO anode and deposited aluminium cathode defines active areas consisting of 6 pixels measuring 4 x 5 mm. The photopolymerized films were developed by double-immersion in pure toluene, dried under a stream of dry nitrogen and transferred to the evaporator (KJLesker) for completion of the OLED by evaporation of ETL/HBL and top electrode. TPBI deposited by vacuum evaporation formed the ETL/HBL (50 nm). LiF (1.2 nm) and Aluminium (100-150 nm) deposited by vacuum evaporation formed the cathode.

Device performance for CBP6-st₄:Ir(ppy)

6.0 cd/A (@120.4 cd/m²), 2.10 lm/W (@ 9.0 V), ToV 6.2 V

Max EQE 6.04 cd/A (@62 cd/m², 2.26 lm/W, 8.4 V)

Max PE 2.70 lm/W (@<10 cd/m², 5.90 cd/A, 7.0 V)

CIE coords x = 0.36 y = 0.59


The EL emission spectrum is shown in figure 2.

device structure ITO/ CBP6-st₄:Ir(ppy)/TPBI/LiF/Al

This device containing a styryl-derivative (CPB-st₄) has a lower turn-on voltage than the device containing the acrylate-derivative (KLCBP1). The efficiency is also higher. It should be noted that the formulation comprised only the monomer and the phosphorescent dopant and that no separate initiator was added. This combination of materials cured well without requiring a specific initiator. As in the previous example the phosphorescent dopant is not chemically bound in the polymerised film.

CLAIMS

1. A composition comprising a mixture of
(A) a polymerisable compound, which undergoes polymerisation on exposure to heat or to actinic radiation, having the general formula




wherein Q is an organic charge transporting fragment, L is a linker group, X is a group capable of undergoing free radical or anionic polymerisation on exposure to heat or actinic radiation, m is 0 or 1, and n is an integer having a value of 2 or more; and

(B) a phosphorescent material.


2. A composition according to claim 1, wherein the organic charge transporting fragment Q has a triplet energy level which is substantially equal to or slightly greater than the energy level of the emissive state of the phosphorescent material.
3. A composition according to either claim 1 or claim 2, wherein X is selected from groups containing ethylenic unsaturation and groups containing a cyclic ether moiety.
4. A composition according to claim 3, wherein X is a group containing an acrylic group, a vinyl group, an allyl group or an epoxide group.
5. A composition according to any one of claims 1 to 4, wherein Q comprises at least one group selected from carbazole and arylamine.

6. A composition according to claim 5, wherein Q has the general formula

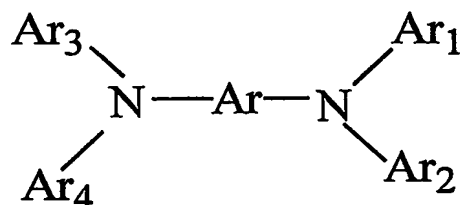


where Ar is an optionally substituted aromatic group and Ar₁, Ar₂, Ar₃ and Ar₄ are the same or different optionally substituted aromatic or heteroaromatic groups or Ar₁ and Ar₂ are linked together to form with the N atom to which they are both attached, a N-containing heterocyclic group and/or Ar₃ and Ar₄ are linked together to form, with the N atom to which they are both attached, a N-containing heterocyclic group and wherein at least two of Ar₁, Ar₂, Ar₃ and Ar₄ are linked to a group $-(L)_m-X$.

7. A composition according to claim 6, wherein Ar₁ and Ar₂ are linked together to form, with the N atom to which they are both attached, an optionally-substituted carbazole group.
8. A composition according to claim 6 or claim 7 wherein Ar₃ and Ar₄ are linked together to form, with the N atom to which they are both attached, an optionally-substituted carbazole group.
9. A composition according to claim 8, wherein the polymerisable compound has the structure

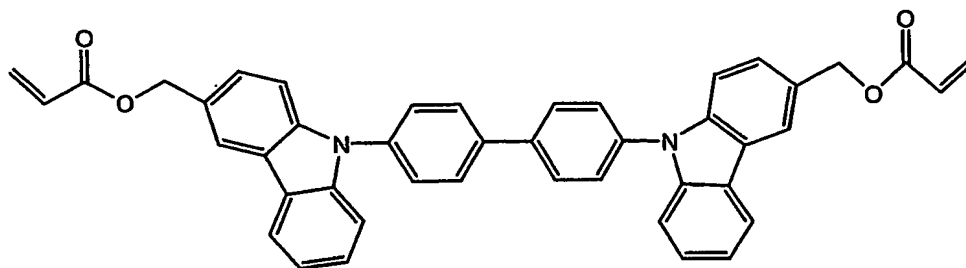

10. A composition according to claim 8, wherein the polymerisable compound has the structure

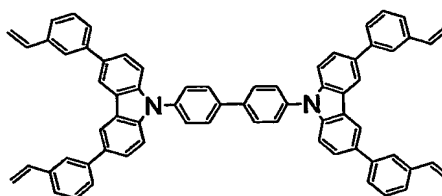

11. A composition according to any one of claims 1 to 4, wherein Q is an electron-transporting group selected from an aryl-substituted oxadiazole group and an aryl-substituted triazole group.
12. A composition according to claim 11, wherein Q is selected from a 3-phenyl-4-(1-naphthyl)-5-phenyl-1,2,4-triazole group and a 1,3-bis (N,N-t-butylphenyl)-1,3,4-oxadiazole group.
13. A composition according to any one of claims 1 to 12, wherein the phosphorescent material is a phosphorescent organometallic complex of a transition metal or a phosphorescent organometallic transition metal dendrimer.
14. A composition according to claim 13, wherein the phosphorescent material is selected from an organometallic complex of iridium, an organometallic complex of platinum and an organometallic iridium dendrimer.

15. A composition according to claim 14, wherein the phosphorescent material is selected from tris(2-phenylpyridine)iridium, bis(2-(2'-benzo[4,5- α]thienyl)pyridinate-N,C^{3'})iridium or 2,3,7,8,12,13,17,18-octaethyl-21H,23H-porphine platinum.
16. A composition according to any one of claims 1 to 15, wherein the phosphorescent material is present in the mixture at a concentration in the range of from 0.5-15 molar %, preferably 2 to 6 molar %.
17. A composition according to any one of claims 1 to 16 which, additionally, contains at least one initiator.
18. A composition according to any one of claims 1 to 16 wherein the composition does not contain a separate initiator.
19. A solid film comprising a thermally-induced polymerisation reaction product of a composition according to any one of claims 1 to 18.
20. A solid film comprising a radiation-induced polymerisation reaction product of a composition according to any one of claims 1 to 18.
21. A film according to either claim 19 or claim 20 in the form of a predetermined pattern.
22. A laminate comprising at least two solid films according to claim 21.
23. An organic light emitting device comprising, laminated in sequence, a substrate, electrode, light emitting layer and counter electrode wherein the light emitting layer is selected from a film according to any one of claims 19 to 21 and a laminate according to claim 22.

24. A device according to claim 23, additionally comprising a hole-transporting layer located between the anode and the light emitting layer.
25. A device according to either claim 23 or claim 24, additionally comprising a hole-blocking layer located between the light emitting layer and the cathode.
26. A device according to any one of claims 23 to 25, additionally comprising an electron-transporting layer located between the light emitting layer and the cathode.
27. A device according to any one of claims 23 to 26 with active-matrix addressing.
28. A method of making a light emitting layer comprising the steps of forming a film of a composition claimed in any one of claims 1 to 18 and exposing the film to heat or actinic radiation to induce polymerisation of the polymerisable compound.
29. A method of making a light emitting layer according to claim 28 wherein the film is exposed to actinic radiation to induce polymerisation of the polymerisable compound.
30. A method according to claim 29 wherein the film is exposed to actinic radiation through a mask and then the exposed film is developed to remove unexposed material.
31. A method of forming a multicolour organic light emitting layer comprising the steps of
 - (i) forming a film of a composition claimed in any one of claims 1 to 18 capable of emitting light of a first colour;

- (ii) exposing the film to actinic radiation through a mask;
 - (iii) removing unexposed material from the film to leave a predetermined pattern of exposed material;
 - (iv) forming, on the predetermined pattern of exposed material obtained in step (iii), a film of a composition claimed in any one of claims 1 to 18 which is capable of emitting light of a second colour different from the first colour; and
 - (v) exposing the film formed in step (iv) to actinic radiation through a mask.
32. A method according to claim 31 which comprises the further steps of
- (vi) removing unexposed material from the film exposed in step (v) to leave a predetermined pattern of exposed material;
 - (vii) forming, on the predetermined pattern of exposed material obtained in step (vi), a film of a composition claimed in any one of claims 1 to 18 which is capable of emitting light of a third colour different from the first and second colours; and
 - (viii) exposing the film formed in step (vii) to actinic radiation through a mask.
33. A method according to any one of claims 28 to 32, wherein the film of the composition is formed by a technique selected from spin-coating, ink-jet printing, dip-coating, roller coating and thermal transfer.

1/1

Figure 1


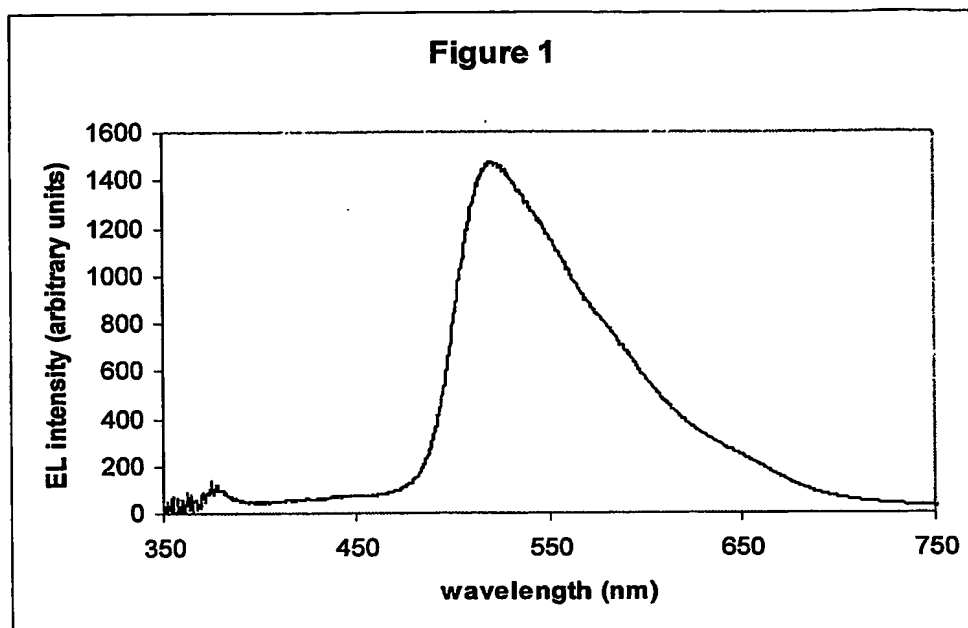


Figure 2

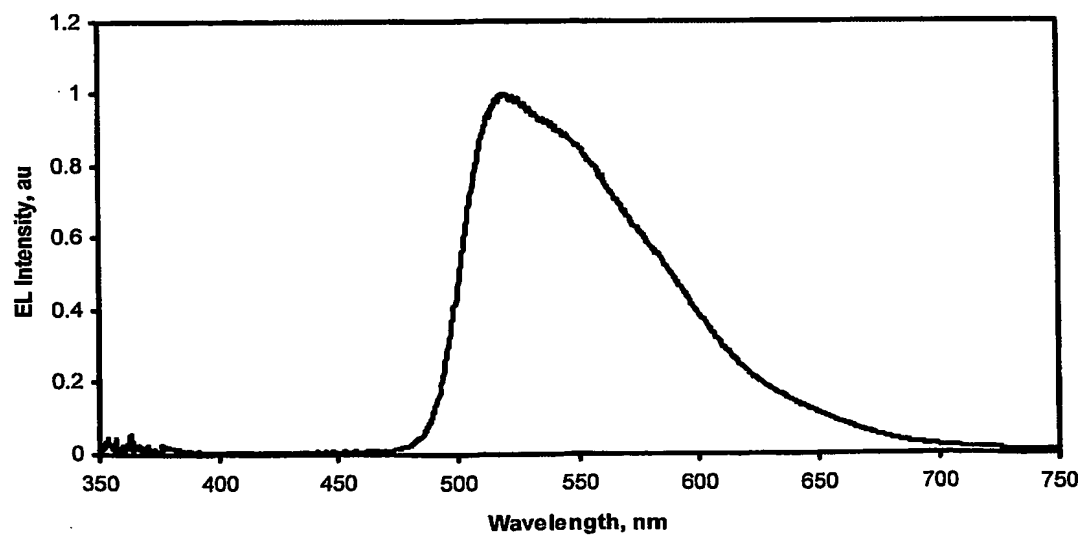

INTERNATIONAL SEARCH REPORT

Internationa Application No

PCT/GB-03/00857

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C09K11/06 H05B33/14 H01L51/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C09K H05B H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 929 194 A (INBASEKARAN MICHAEL ET AL) 27 July 1999 (1999-07-27) claims 1-16; example 28	19-33
X	US 2001/019782 A1 (KIMURA KEIZO ET AL) 6 September 2001 (2001-09-06)	1-8, 11, 13-16
Y	* claims 1-9; comparative example 2 *	19-33
A	US 5 518 824 A (FUNHOFF DIRK ET AL) 21 May 1996 (1996-05-21) cited in the application claims 1-20; example 2	1-33
	--- -/-- ---	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

6 June 2003

Date of mailing of the international search report

16/06/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lehnert, A

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 26, 1 July 2002 (2002-07-01) & JP 2001 257076 A (TDK CORP; KIDO JUNJI), 21 September 2001 (2001-09-21) abstract ----	1-33
A	US 5 814 244 A (KREUDER WILLI ET AL) 29 September 1998 (1998-09-29) the whole document ----	1-33
A	WO 01 49769 A (TOWNS CARL ROBERT ; DELL RICHARD O (GB); CAMBRIDGE DISPLAY TECH (GB) 12 July 2001 (2001-07-12) claims 1-38 ----	1-33
A	EP 0 891 121 A (TDK CORP) 13 January 1999 (1999-01-13) the whole document ----	1-33
A	US 6 303 238 B1 (FORREST STEPHEN R ET AL) 16 October 2001 (2001-10-16) cited in the application the whole document ----	1-33
A	WO 00 57676 A (UNIV SOUTHERN CALIFORNIA) 28 September 2000 (2000-09-28) cited in the application the whole document -----	1-33

INTERNATIONAL SEARCH REPORT

Internal Application No

PCT/GD 03/00857

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5929194	A	27-07-1999	AU 2277697 A WO 9733193 A2	22-09-1997 12-09-1997
US 2001019782	A1	06-09-2001	JP 2001345183 A JP 2001247859 A	14-12-2001 14-09-2001
US 5518824	A	21-05-1996	DE 4325885 A1 CN 1103230 A DE 59407212 D1 EP 0637899 A1 ES 2122108 T3 JP 7114987 A	09-02-1995 31-05-1995 10-12-1998 08-02-1995 16-12-1998 02-05-1995
JP 2001257076	A	21-09-2001	NONE	
US 5814244	A	29-09-1998	DE 19532574 A1 DE 19535938 A1 CN 1199414 A WO 9709394 A1 EP 0848739 A1 JP 2002515078 T	06-03-1997 03-04-1997 18-11-1998 13-03-1997 24-06-1998 21-05-2002
WO 0149769	A	12-07-2001	AU 2385001 A CN 1419574 T EP 1246860 A1 WO 0149769 A1 US 2001037012 A1 AU 3761801 A EP 1263837 A1 WO 0166618 A1	16-07-2001 21-05-2003 09-10-2002 12-07-2001 01-11-2001 17-09-2001 11-12-2002 13-09-2001
EP 0891121	A	13-01-1999	EP 0891121 A1 US 6344283 B1 WO 9830071 A1 US 2002102434 A1	13-01-1999 05-02-2002 09-07-1998 01-08-2002
US 6303238	B1	16-10-2001	AU 1070799 A EP 1044586 A2 JP 2001520450 T TW 476227 B WO 9920081 A2 US 2001053463 A1	03-05-1999 18-10-2000 30-10-2001 11-02-2002 22-04-1999 20-12-2001
WO 0057676	A	28-09-2000	AU 3908400 A BR 0009215 A CN 1350768 T EP 1181842 A1 JP 2002540572 T WO 0057676 A1 US 2003017361 A1 US 2002034656 A1	09-10-2000 16-04-2002 22-05-2002 27-02-2002 26-11-2002 28-09-2000 23-01-2003 21-03-2002

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.